


FIG. 1

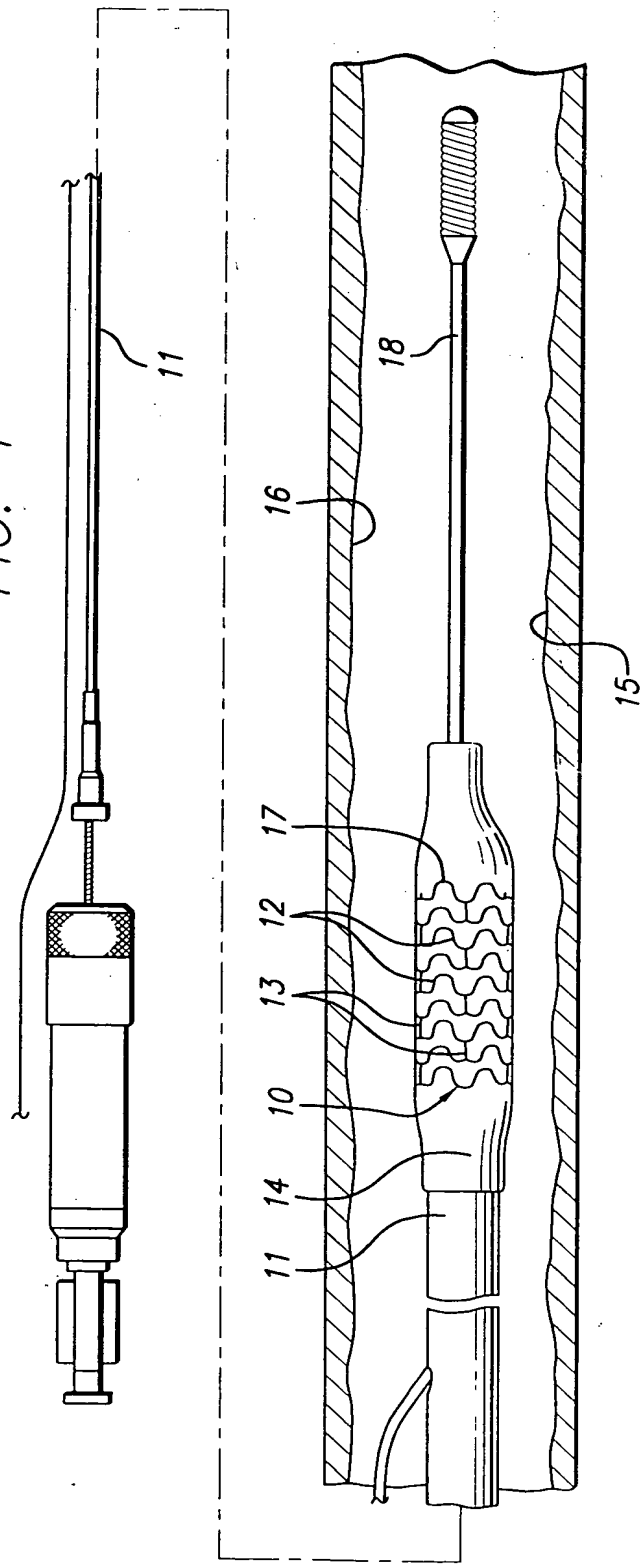

1/8

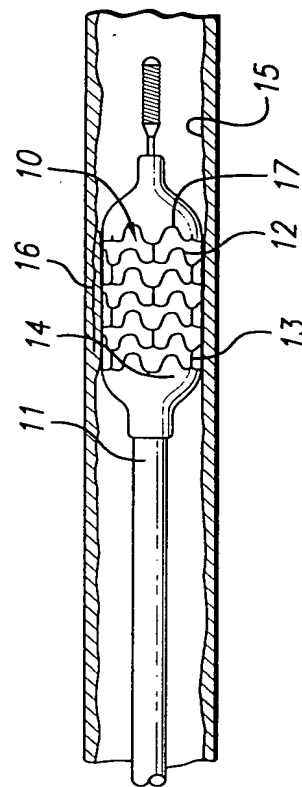


FIG. 2

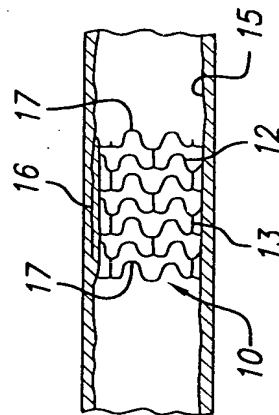


FIG. 3



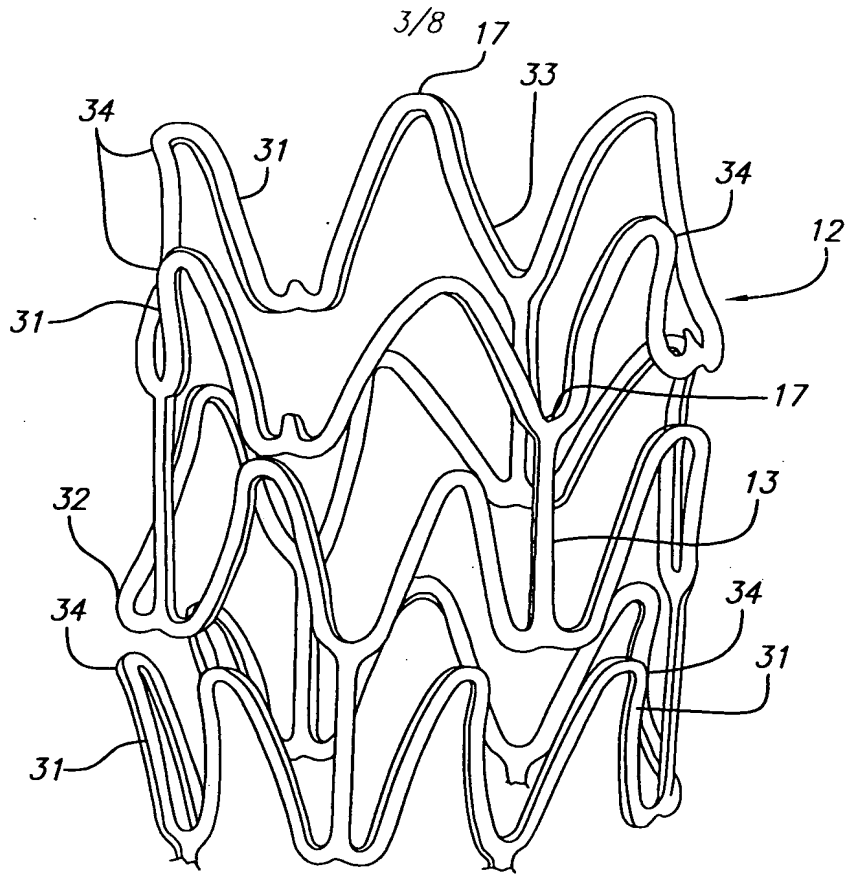


FIG. 6

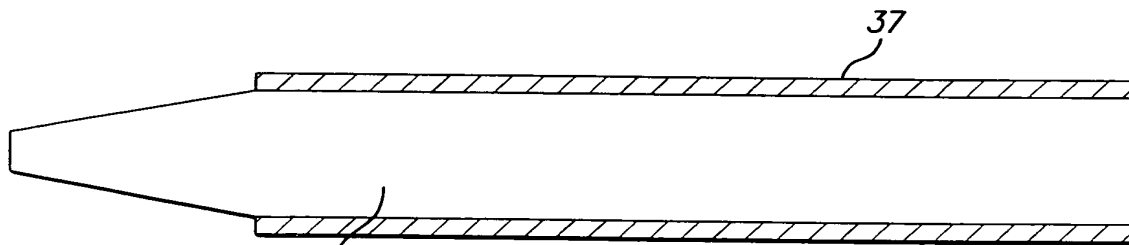


FIG. 7A

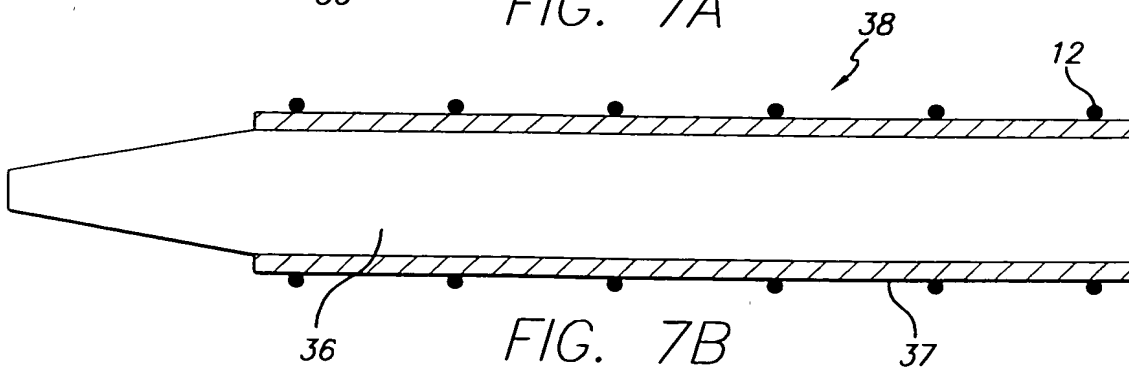


FIG. 7B

FIG. 1 is a perspective view of a cylindrical member 40. The member has a diameter of 4/8. It features a series of curved, overlapping segments 42 and a central textured region 44.

FIG. 7C is a perspective view of a portion of the device, showing the interlocking structure of the first and second layers. The first layer (12) and second layer (47) are shown with their respective interlocking features (48 and 49) and the resulting mesh structure (50).

FIG. 9

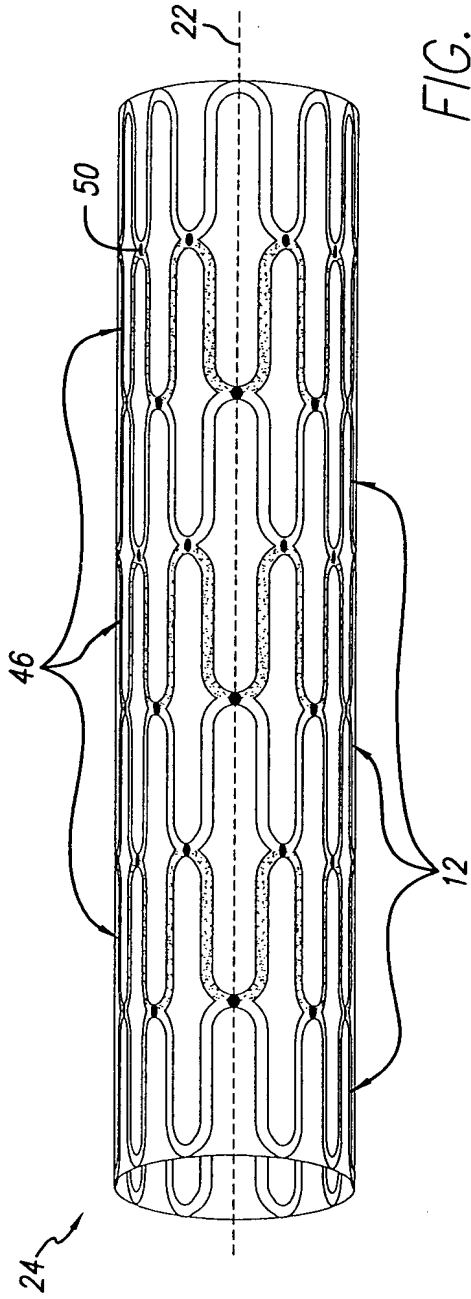


FIG. 10

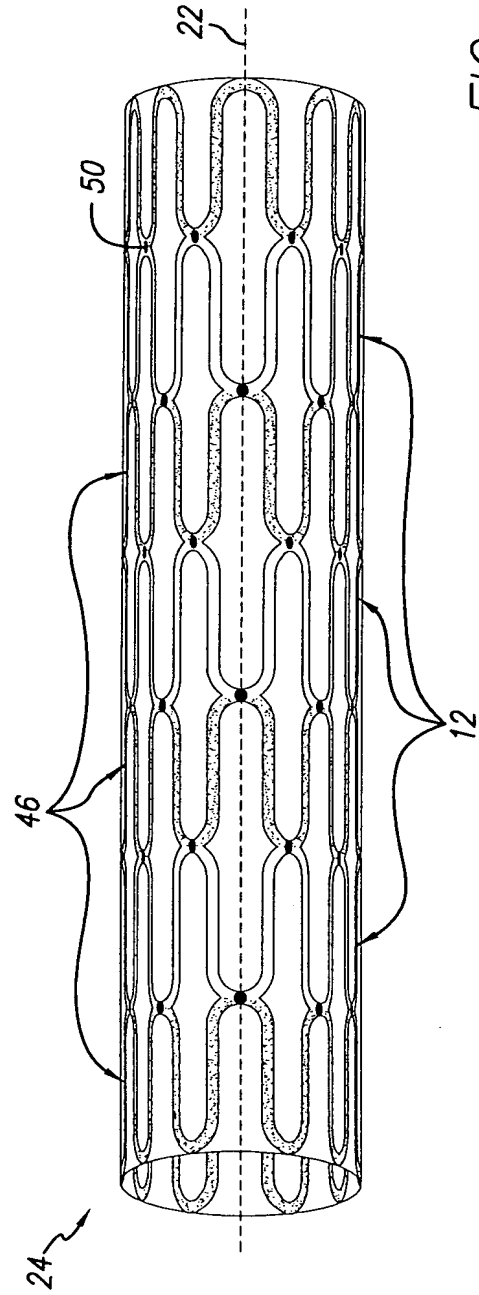


FIG. 11

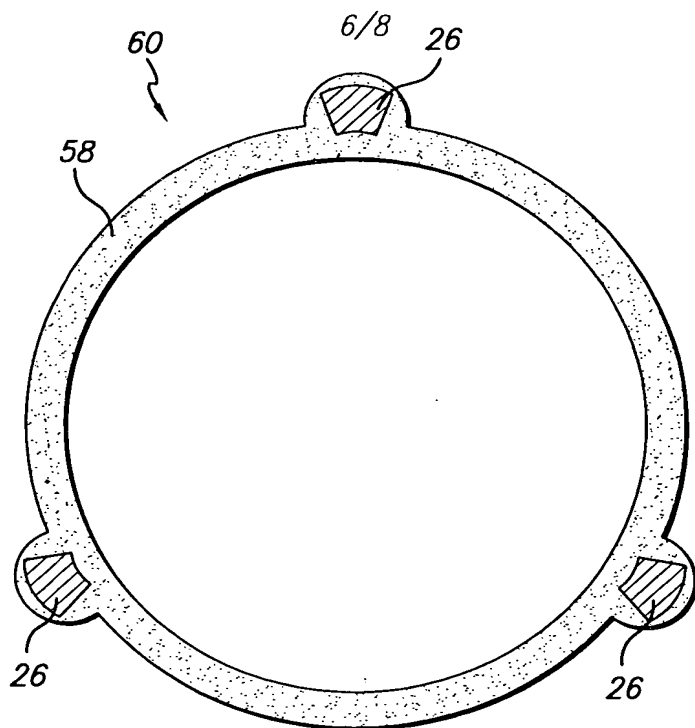


FIG. 12A

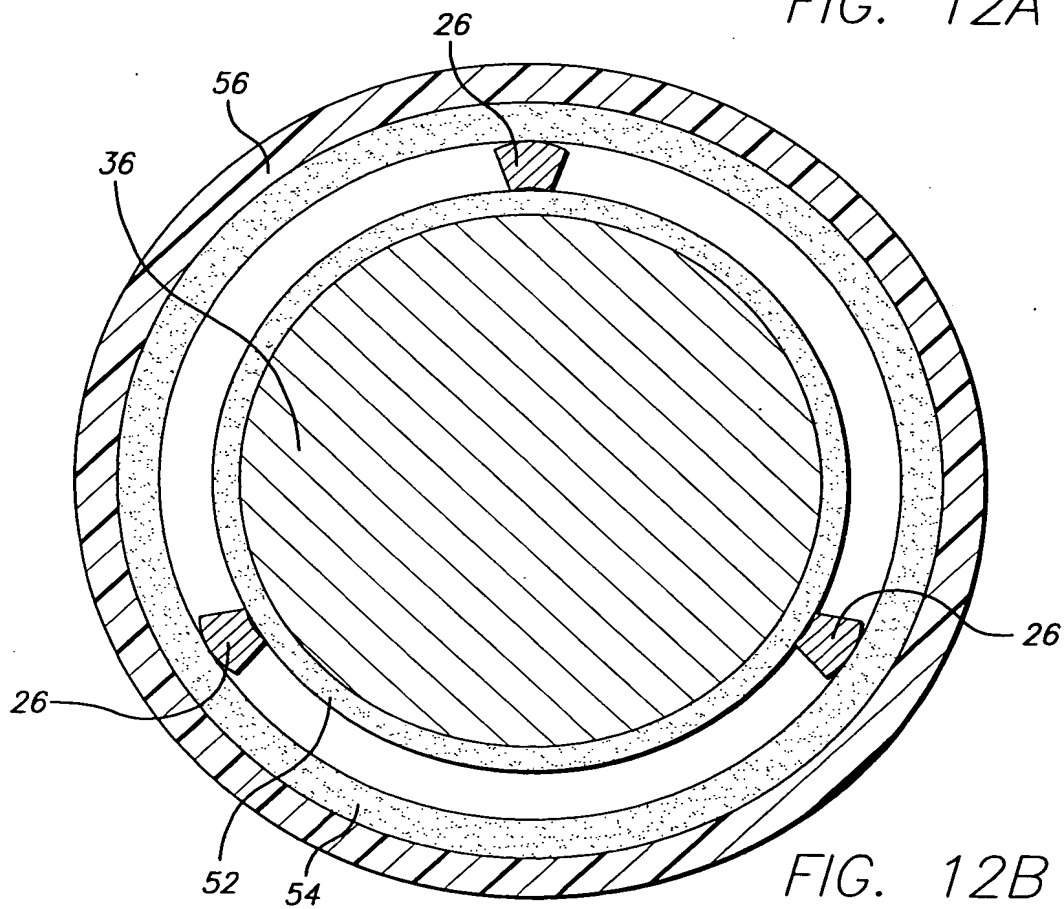


FIG. 12B

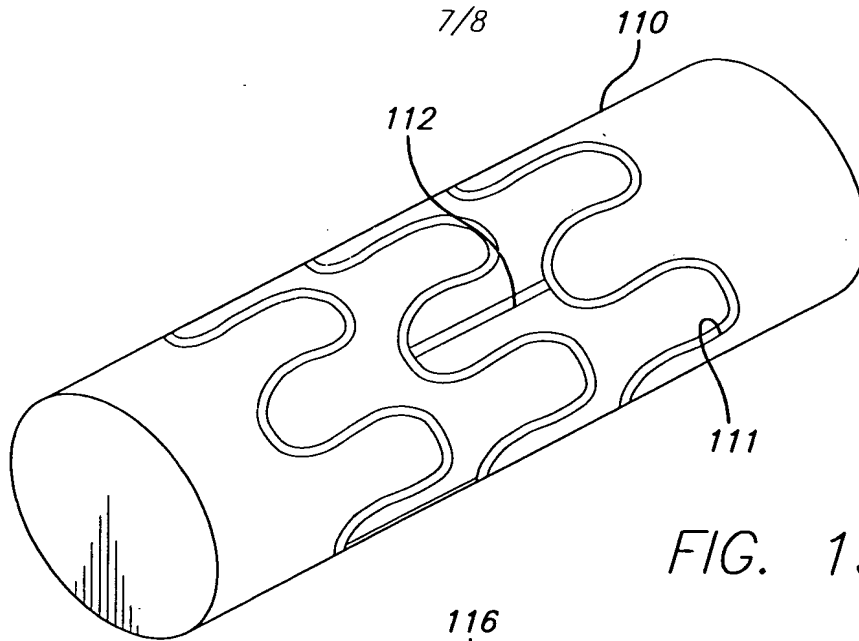


FIG. 13

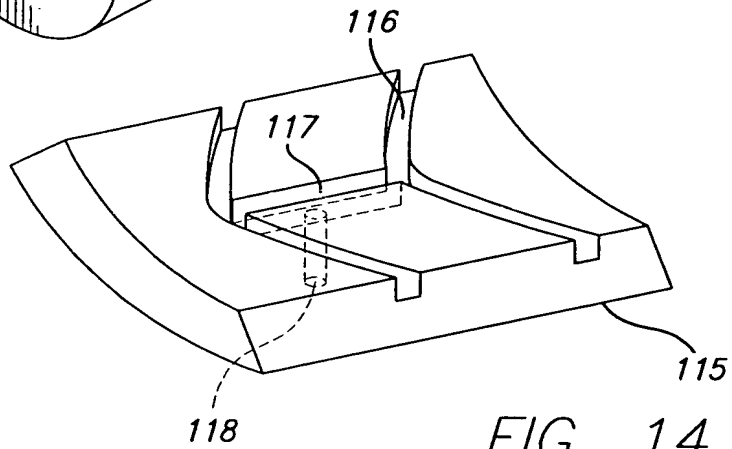


FIG. 14

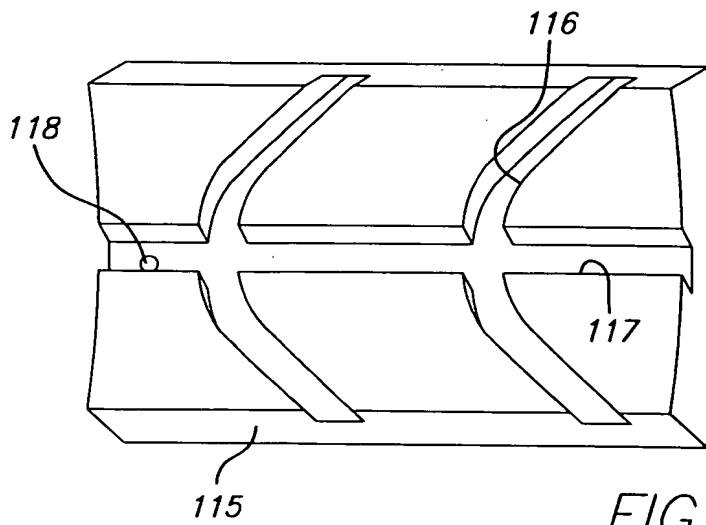


FIG. 15

FIG. 16

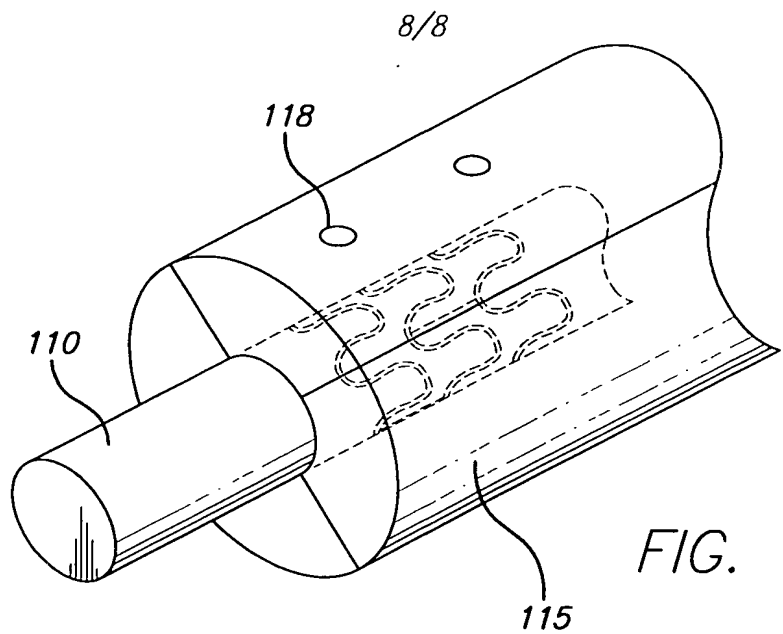


FIG. 16

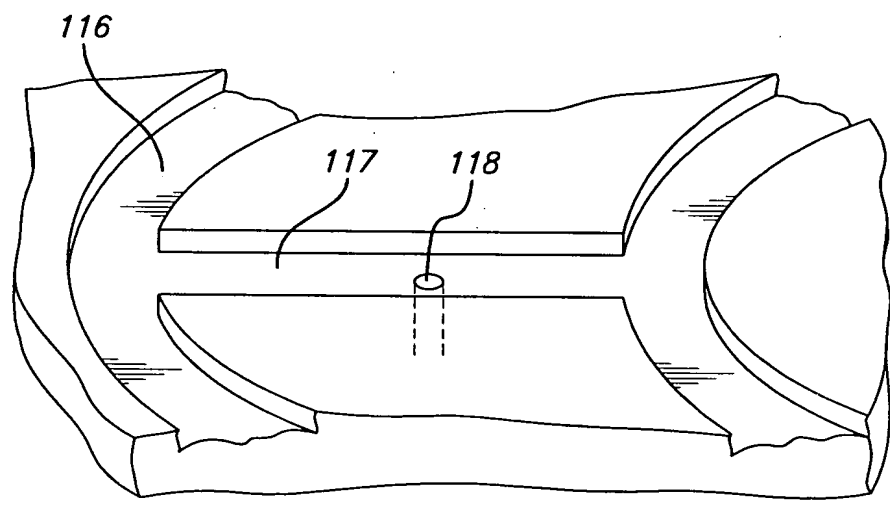


FIG. 17

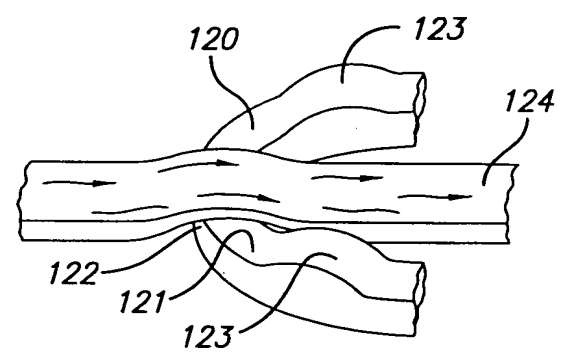


FIG. 18